

Correct as at 26th June 2026. It may be superseded at any time.

Extract taken from: Alternative fuel system certification > CNG inspection > Cylinder

2-3 Cylinder

Reason for rejection

Condition

1. The cylinder's test date and cylinder testing station identification mark:
 - a) are missing, or
 - b) are not legible, or
 - c) have been altered, or
 - d) have not been stamped on the container.
2. There are more than five years between the test date stamped on a cylinder and the date of the next alternative fuels inspection.
3. A cylinder shows evidence of impact damage, corrosion, or heating by fire.

Note 1

Cylinder means a pressure vessel, or gas cylinder for the storage of CNG to be used as fuel for an engine.

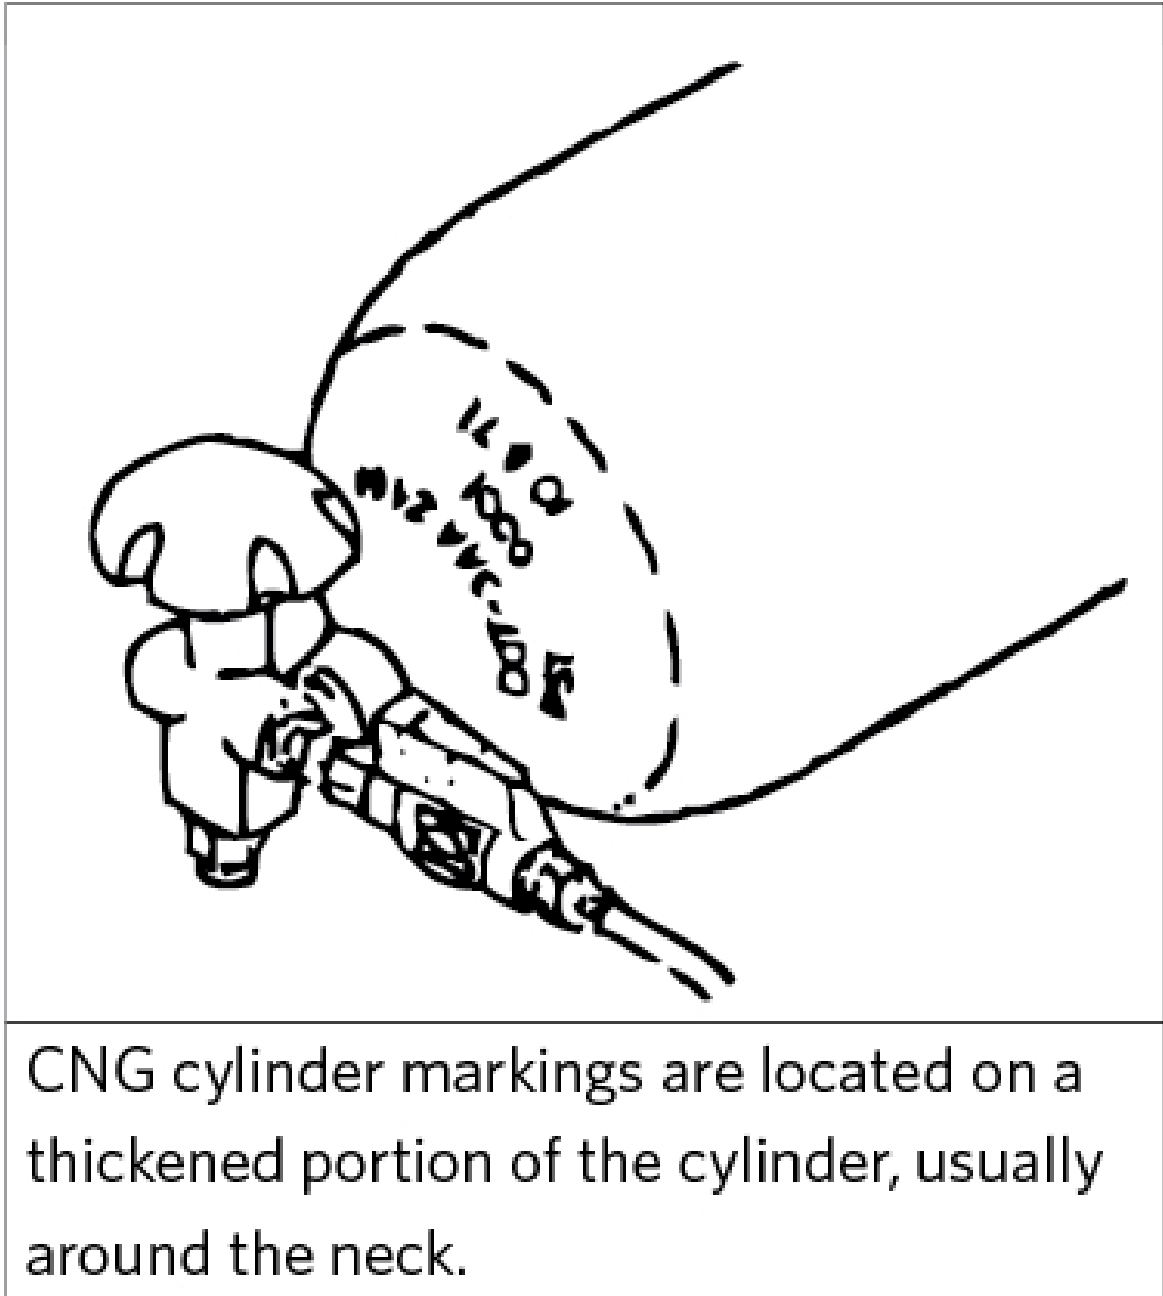


Figure 2-3-1. Cylinder markings

Summary of legislation

Applicable legislation

- AS/NZS 2739: 2003, section 6.9.

Condition

1. The cylinder must be stamped with the test date and the identification mark of the cylinder testing station.
2. The date stamp on a cylinder must be within five years of the next alternative fuels inspection.
3. A cylinder must not show evidence of impact damage, corrosion, or heating by fire.