

Correct as at 26th June 2026. It may be superseded at any time.

Extract taken from: Heavy vehicle specialist certification > Introduction

# Introduction

## 1 Purpose and scope

NZ Transport Agency Waka Kotahi (NZTA) has prepared this document, *Vehicle inspection requirements manual: Heavy vehicle specialist certification* to enable heavy vehicle specialist and manufacturing inspectors to achieve correct and consistent standards of inspection and certification. In this VIRM, any reference to the NZ Transport Agency, Waka Kotahi or NZTA includes reference to the Director of Land Transport (the Director).

Heavy vehicle specialist and manufacturing certifiers are required to certify specialist aspects of heavy vehicles. They are appointed by NZTA under section 2.2(1)(i) of the [Land Transport Rule: Vehicle Standards Compliance 2002](#) (the Rule) as vehicle inspectors and/or inspecting organisations.

In order to prepare a vehicle for operational service in New Zealand, the owner may be required to fit additional equipment and to modify the vehicle design to optimise the vehicle for the role in which it is to be employed.

This modification and mounting of additional equipment must result in a vehicle that is deemed by NZTA to be safe to operate.

This means that the modifications (including any repairs or addition of equipment):

- are designed to be technically sound
- are done to a high standard of workmanship
- use parts and materials that are fit for their purpose
- comply with any standards that are applicable
- do not give the vehicle any unacceptable characteristics.

NZTA appoints heavy vehicle specialist inspectors (HVS or HVM VI) and inspecting organisations (IO) to carry out technical assessment of repairs and modifications. Since the range of knowledge, expertise and experience needed to make these assessments is very wide, HVS certifiers are appointed to certify various aspects of a vehicle. In this manual, these inspectors are generally referred to as HVS certifiers.

Read more about the different roles and requirements to gain qualifications/be appointed as a heavy vehicle specialist certifier.

### [Heavy vehicle specialist applications](#)

These aspects and NZTA requirements for them are covered in this manual. The purpose of this document is to:

- supplement the notices of appointment currently in force for HVS certifiers
- cover the requirements for the inspection and certification of specialist aspects of heavy vehicles.

This VIRM is published online only and is not supplied in hard copy.

Amendments to this manual will be issued from time to time as inspection requirements change and improvements are made. Details of amendments are available from the Amendments tab on the horizontal menu. Suggestions for improvement should be made using the feedback button found on every page.

### [Amendments](#)

HVS/M certifiers must ensure they have access to, are familiar with and use, the latest version of the VIRM.

Where appropriate NZTA will consult with HVS/M inspecting organisations prior to the confirmation of amendments to this manual.

An appointed certifier or inspecting organisation (IO) cannot use the NZTA brand, logo or name in connection with their business unless such use is approved in writing by NZTA.

### Contacting NZTA

<b>Phone</b>	0800 587 287  then follow the instructions
<b>Technical queries</b>	<a href="mailto:hvscinfo@nzta.govt.nz">hvscinfo@nzta.govt.nz</a>
<b>Administrative queries</b>	<a href="mailto:vehicleinspections@nzta.govt.nz">vehicleinspections@nzta.govt.nz</a>

### Safety Issues – safe work practices

Correct use of this VIRM may involve the use of hazardous materials, work practices or operations and equipment. It is the responsibility of the HVEx/HVxD certifier and IO to establish appropriate safety and health practices required by legislation. Safe work practice shall be employed at all times.

The methods and processes used for the manufacture or repair of a heavy vehicle (HV) combine the requirements of the Health and Safety at Work Act 2015 and any relevant manufacturer's recommendations – neither of which are administered by NZTA.

This also applies to the avoidance of damage to equipment or the work or, in the case of a repair, further damage to the item being repaired. Refer to your HSE manual and work instructions before commencing any work. For repairs most vehicle manufacturers also make recommendations on safe practices.

Page amended **1 November 2021** (see [amendment details](#))

Page updated 21 August 20245 (see [details](#))

## 2 Overview of the manual

The manual is in two main parts:

### 1. Introduction

The introduction summarises the duties and responsibilities of the HV certifier which are set out in detail in the relevant Notice(s) of Appointment, explains the inspection and certification process, complaints procedures, inspection premises and equipment, and appointment of HV certifiers.

Also included are definitions and abbreviations and sample certification documents.

The term 'he' in respect of an HV certifier, is intended to include 'she'.

### 2. Technical

This part of the manual covers the requirements for the certification of modifications, mounting of components, design and manufacture of vehicles and components and repairs to individual aspects of heavy vehicle components, structures and systems.

To use the manual:

- the HV certifier identifies each system, structure, component, aspect or performance characteristic affected by the modification, manufacture or repair
- the HV certifier selects the corresponding chapter(s) from the technical part and inspects the vehicle to determine whether the requirements have all been met.

Not all chapters in the technical section are devoted to aspects of vehicles that are to be certified. Some of them, such as [1-1 VIN](#), [2-1 External projections](#), and [3-1 Dimensions](#), are to assist in the assessment of other aspects. Other chapters, such as [11-1 Welding](#) and [11-2 Conversion to right-hand drive](#) are also concerned with topics that are not aspects in themselves but pool all the requirements to be considered where these items are involved.

Each chapter of the technical part consists of up to six parts:

<b>Required certifier categories</b>	shows the certifiers who are concerned with the chapter material.
<b>Summary of legislation</b>	summarises the legislation that is relevant to that section.
<b>Applicable references</b>	refers to standards, codes and other documents that contain requirements.
<b>Requirements of the legislation</b>	contains a synopsis of the requirements in legislation and other directives of NZTA
<b>Notes</b>	are for additional guidance, where required.
<b>Reasons for rejection</b>	specifies the conditions that must result in the vehicle being rejected by the specialist certifier

Page amended **1 November 2021** (see [amendment details](#))

## 3 Inspection and certification

### 3-1 Duties and responsibilities

In order to inspect and certify an aspect of a vehicle for a Heavy Vehicle Specialist Certificate (LT400), the HVS/M certifier must:

1. be appointed by NZTA [or the Director](#) under [section 2.2 of](#) the Rule for the aspect of the vehicle being certified
2. know the certifier's responsibilities
3. identify the vehicle class according to [section 3.4](#) of this introduction
4. identify whether the vehicle requires certification. [Section 3.3](#) of this introduction identifies the threshold for HV certification
5. establish whether the vehicle complies. [Section 3.5](#) and [section 3.6](#) of this introduction explain how to determine the vehicle's compliance with the requirements
6. complete the inspection documentation, Heavy Vehicle Specialist Certificate, LT400, and any other required labels or plates. [Section 3.7](#) of this introduction explains the requirements for handling and completing the form
7. when collecting fees take [section 3.8](#) of this introduction into account

8. to enable NZTA to efficiently contact the certifier, the certifier must provide and maintain an email address which NZTA must use to provide any notice required or permit to be sent out by NZTA to any or all HV certifiers or IO.

### **3.1.1 General duties and responsibilities**

The HV certifier's prime duty is to ensure that a new, modified or repaired vehicle is safe and in compliance with the legal requirements for the aspect of the vehicle that the certifier is approved and required to certify as a Heavy Vehicle Specialist or Manufacturing Inspector or Inspecting Organisation, in [Land Transport Rule: Vehicle Standards Compliance 2002](#) (the Rule), and in this manual.

The HV certifier shall establish, and use at all times, appropriate and reasonable inspection and certification procedures that are efficient and comply with the Rule, [the Notice\(s\) of Appointment](#), the VIRM and the law.

The HV certifier shall not certify any modification or repair to a vehicle unless and until they have first satisfied themselves that the design, manufacture and installation of the modification or repair take into account the original design, manufacture and installation, and that the vehicle meets the relevant applicable requirements and is safe at the time of certification.

### **1. HV certifier**

HV certifier means an individual appointed by NZTA under 2.2(1)(i) of the Rule to carry out inspection and certification activities in accordance with requirements and conditions imposed by NZTA, [or the Director](#), and who is responsible for the inspection and certification outcome.

In this document, a HV certifier is one appointed for the purpose of heavy vehicle specialist or manufacturing inspection and certification. This is defined in section 6.5(1)(d) and 7.5(1)(b) of the Rule as specialist inspection and certification of modifications or repairs to the:

- load anchorages
- chassis and structure
- suspension or steering, including drive train, engine transmission and axles
- brakes
- towing connections
- log bolster attachments
- PSV structural strength, stability and roof racks, as well as
- the static rollover threshold (SRT) of a heavy vehicle
- swept path and heavy vehicle dynamics
- structural composites.

### **2. Inspection and certification activities (section 2.2(1)(i) of the Rule)**

HV certifiers must carry out inspection and certification of modifications or repairs to a heavy vehicle that has been modified since it was manufactured or last certified so as to affect its compliance with an applicable requirement.

### **3. Primary duty (section 2.1(2) of the Rule)**

HV certifiers must carry out inspection and certification activities competently and diligently, and in accordance with the Rule, this document, their Notice of Appointment, the [Model QMS](#) and other relevant requirements of NZTA and legislation.

#### 4. Inspection and certification activities that can be carried out (section 2.2(2) of the Rule)

HV certifiers may carry out only those inspection and certification activities for which NZTA or the Director has appointed them.

HV certifiers are appointed as one of the following types:

- engineer
- local manufacturer (NZ)
- SRT certifier.

They may be appointed for one or more certification categories:

**Table 1. Certifier Categories**

Category	Specialist aspect
HVEC HMCD	Chassis, suspension, steering, PSV, drive train, engine transmission and axles
HVET HMTD	Towing connections
HVEA HMAD	Load anchorages
HVEL HMLD	Log bolster attachments
HVEK HMKD	Brake modification
HVP1 HVP2	Swept path Heavy vehicle dynamics
HVS1 HVS2 HVS3	Static rollover threshold

## 5. Requirements, conditions and period of appointment (section 2.3(1) of the Rule)

NZTA may specify the period of appointment for an HV certifier and may impose requirements and conditions as to the performance of the inspection and certification activities, including the performance of those activities at individual sites. The Notice of Appointment states a period of appointment of seven years from the date the appointment starts. The period of appointment may be extended up to a maximum of ten years at the discretion of the Director. Appointments may be surrendered in writing by appointees, or be suspended or revoked by the Director in accordance with the Rule.

From the date of the end of an appointment for any reason (including surrender, suspension, or revocation) no inspection or certification activities can be carried out until the appointment is reinstated or renewed.

The HVSC Engineer Notice(s) of Appointment specify other requirements, including:

- a minimum number of inspections and certifications per annum
- self-reporting of information (such as information related to fitness and propriety)
- quality assurance and performance management systems
- making, maintaining and providing records of the activities
- management of conflicts of interest and other inappropriate influences
- insurance requirements

Please check your current notice of appointment for details.

## 6. Presentation and acceptance of emailed Inspection and certification documents

LT400s, chassis ratings and professional opinions from heavy vehicle specialist certifiers can be emailed to CoF vehicle inspectors and inspecting organisations provided:

- (i) emails are sent directly to the vehicle inspector or inspecting organisation from the heavy vehicle specialist certifier, and
- (ii) the electronic copy contains all of the information from the original copy and is clear and legible.

## 7. Delegation (section 2.4(1) of the Rule)

An HV certifier may be permitted by their Notice of Appointment to delegate certain functions or powers to carry out inspection and certification activities for which he was appointed.

An HV certifier may delegate certification work according to their appointment category and Table 2: Delegations:

**Table 2. Delegations**

<b>Category</b>	<b>Duties (Note 1)</b>	<b>Delegation</b>	<b>To</b>
<b>Engineer</b>	Initial assessment  (excluding repairs)	Yes	A person reasonably considered by the HVSC to be competent and trustworthy. That person should consult with the HVSC before beginning any work and may use photographs for assistance. The HVSC remains responsible for all delegated work.
	Initial assessment  (repairs)	Yes, but not for complex repairs or repairs of fatigue critical components (Note 3).	As above. Additionally, all parties involved must undertake best endeavours to determine the root cause of the issue to be repaired before starting work.
	Design	Yes, but must personally approve the design to  be complete before manufacture	A person reasonably considered to be competent.
	Monitoring of manufacture or installation	Yes	A person reasonably considered to be competent
	Final inspection	No	
	Sign off (PDS/LT400 etc)	No	
<b>Local manufacturer (IO)</b>	Provide facilities to allow Local manufacturer VI to be effective	No	
<b>Local manufacturer (VI)</b>	Initial assessment	Yes	A person reasonably considered to be competent.
	Monitoring of manufacture or installation	No	Unless passed to an alternative Local manufacturer certifier or Engineer certifier with a SoDC.

Final inspection	No	Unless passed to an alternative Local manufacturer certifier or Engineer certifier with a SoDC.	
Sign off (PDS/LT400 etc)	No		
<b>Static rollover threshold</b>	Calculations for deriving the SRT and issuing a record of determination	Measurements	Another SRT certifier or a person who has passed the TERNZ SRT course.

### Note 1

An engineering certifier may transfer responsibility for any of the duties listed in Table 2 to another engineering certifier using a SoDC. Both engineering certifiers must hold the appropriate certification category. Where an SoDC is used in this way this is not a delegation as the issuer of the SoDC takes responsibility only for the aspects covered by the SoDC, with the issuer of the LT400 taking responsibility for all other aspects. This differs from a delegation, where the delegating engineer keeps full responsibility for the work carried out by the person they delegate to.

### Note 2

No other delegations may be made without the express written consent of NZTA.

### Note 3

Inspection of damage to the following components may not be delegated and must be assessed in the as-damaged state by the engineer:

- towing connections (except for replacement of bent or worn tow eyes)
- log bolster attachments
- chassis flanges
- subsequent failure of a previous repair.

A task which has been delegated to a specified employee may not be delegated further by that employee. HV certifiers are responsible for the outcomes or consequences of any delegated task.

HV certifiers must maintain a record of all persons that they have approved in accordance with any specifications in the Performance Review System manual that supports this manual.

A local manufacturer certifier (IO), who derives their authority to certify any aspect of a vehicle from the qualifications and role of a staff member agrees to inform NZTA of any change to the role or employment of that staff member.

A local manufacturer certifier (VI), who derives, in part, their authority to certify any aspect of a vehicle from their role as a staff member of a Local manufacturer certifier (IO) agrees to inform NZTA of any change to their role or employment

status.

The HV certifier must ensure that, where any employee, agent or contractor to the HV certifier is authorised by the HV certifier in accordance with their appointment to carry out any part of the services on behalf of the HV certifier, that person complies in all respects with the obligations of the HV certifier under their appointment.

### **3.1.2 Inspection and certification**

#### **1. Heavy vehicle specialist inspection and certification (sections 6.5(1), 6.5(4), 6.5(5), 7.5(4) and 7.5(5) of the Rule)**

The inspection and certification of a vehicle must be carried out in accordance with the requirements and conditions imposed by NZTA.

NZTA requirements and conditions are contained in this manual ('the VIRM'), HVS Memos, specified standards and codes, the [Model QMS](#), and the Notice of Appointment.

The HV certifier will provide and perform the services in accordance with any published professional or ethical standards of professional bodies to which they belong.

#### **2. Determining compliance of a specific aspect (sections 6.5(5), 7.4 and 11.1 of the Rule)**

A specific aspect of a vehicle may be certified as meeting the requirements of the Rule if an HV certifier has identified the vehicle and has determined, on reasonable grounds, that the specific aspect:

- a) has not compromised the safe operation of the vehicle
- b) has been designed and constructed using components and materials that are fit for their purpose and is within safe tolerance of its state when manufactured or modified
- c) complies with the applicable requirements
- d) is lawful and no technically competent person (recognised by NZTA) would dispute that the inspection and certification of the vehicle complies with applicable requirements.

#### **3. Record of determination (sections 6.6 and 7.6 of the Rule)**

When an HV certifier has determined whether a specific aspect of a vehicle complies, the HVS certifier must make a record of that determination on the Heavy Vehicle Specialist Certificate, LT400 – for each certification (that is, one certification for each aspect certified).

#### **Examples:**

1. A semi-trailer that is fitted with a fifth wheel, kin pin, load anchorages, and log bolsters requires **five separate** Heavy Vehicle Specialist Certificates as in the table below:

Component	Certification Category	Code/Standard Certified to
Fifth wheel	HVET or HMTD	NZS 5450
Kin pin	HVET or HMTD	NZS 5451
Load anchorages	HVEA or HMAD	NZS 5444
Log bolsters	HVEL or HMLD	Bolster Attachment Code
Brakes	HVEK or HMKD	Schedule 5/Section 6 HVBR

2. A 4 x 2 truck that has the chassis lengthened, a tag axle fitted, new load anchorages, and a draw beam requires **four separate** Heavy Vehicle Specialist Certificates as in the table below:

Component	Certification Category	Code/Standard Certified to
Chassis, suspension,	HVEC or HMCD	HV Rule
Brakes	HVEK or HMKD	Schedule 5/Section 6 HVBR
Load anchorages	HVEA or HMAD	NZS 5444
Draw beam	HVET or HMTD	NZS 5446

3. A bus or coach **manufactured** in NZ that already has 'brakes' standard compliance, requires **two separate** Heavy Vehicle Specialist Certificates as in the table below: (Additional Certification will be required if the vehicle is fitted with a tow bar, roof rack, a wheelchair hoist, powered ramp or wheelchair/wheelchair occupant restraints or is modified and requires brake certification.)

Component	Certification Category	Code/Standard Certified to
Stability,	HVEC or HMCD	PSV Rule
Rollover Strength	HVEC or HMCD	PSV Rule

The HV certifier must immediately inform NZTA of any theft of any NZTA documents supplied to the HV certifier by NZTA or any agent of NZTA, or prepared by the HV certifier on behalf of NZTA.

The HV certifier must return to the document supplier or NZTA or destroy as required by NZTA any surplus or obsolete NZTA documents.

#### **4. LT400**

The LT400 presented must be the original or emailed directly to a CoF inspector or inspecting organisation. Where the original LT400 has been lost or destroyed the certifier may provide a duplicate (photocopy) provided it is signed and dated by the HV certifier.

#### **5. Standards**

Where an HV certifier is required to use a standard during the inspection and certification process, the latest version of the standard must be used except where otherwise specified.

The HV certifier must have available and use any and all standards which are referenced in the Rule or which the HV certifier references in certification.

The HV certifier must comply in all respects with any written instructions, interpretations or guidelines issued by NZTA to the HV certifier.

##### **3.1.3 Re-inspection and re-certification (section 11.4 of the Rule)**

If a Heavy Vehicle Specialist Certificate, LT400, has been **revoked**, NZTA may require **the HV certifier to repeat the inspection and certification of the vehicle, issue (if appropriate) a new certification, and meet the re-inspection and re-certification costs.**

##### **3.1.4 Performance review (section 3.1(1) of the Rule)**

NZTA, either directly or through an appointed agent, may monitor and review the performance of a HV certifier, including the performance of inspection and certification activities.

The requirements and conditions are contained in **the Rule**, this document, the Notice of Appointment and the **Model QMS**

NZTA may require a HV certifier to provide such information as NZTA reasonably considers relevant. A HV certifier must comply with these requirements (unless expressly stated in the Notice of Appointment or this VIRM, no functions, duties or powers which may be exercised by NZTA under any statute, regulation or rule, including under section 198 of the **Land Transport Act 1998**, are in any way restricted).

##### **Costs of monitoring and review (section 3.1(4) of the Rule)**

HV certifiers must bear the costs of the monitoring and reviewing of their performance in accordance with any fee **prescribed in the Rule or other applicable legislation.**

##### **3.1.5 Investigations**

###### **1. Investigations (sections 3.2(1) and 3.2(8) of the Rule)**

If NZTA has reason to believe that an HV certifier has failed to comply with any of the conditions of his appointment, NZTA may require the HV certifier to undergo an investigation and to provide such information as NZTA reasonably considers appropriate as part of the investigation. NZTA may observe or inspect the equipment or activities of the certifier and copy relevant books and records.

Refusal to undergo monitoring, review, or investigation will be a breach of the Rule and the Notice(s) of Appointment and may result in further regulatory action.

## **2. Notification of action (other than immediate suspension/imposition of conditions) (section 3.2(3) of the Rule)**

Following an investigation and before carrying out action, NZTA will notify the HV certifier in writing of:

- a) the action that is being considered
- b) the reason for the action that is being considered
- c) the date by which submissions may be made to NZTA in respect of the action that is being considered, which must be at least 21 days after the notice was given
- d) where appropriate, the date on which the action that is being considered will take effect, which, unless NZTA determines otherwise, must be at least 28 days after the notice was given.

## **3. Responding to a notification of action (section 3.2(5) of the Rule)**

If a HV certifier is notified as above, he must ensure that he provides NZTA with all information within the period specified in the notice.

## **4. NZTA will consider submissions (section 3.2(6) of the Rule)**

NZTA will consider the submissions and information supplied, and will:

- a) decide whether or not to take the action that is being considered
- b) as soon as is practicable, provide written notification to the HV certifier of:
  - i. the NZTA decision, and
  - ii. if appropriate, the date on which the action is take effect, and
  - iii. if appropriate, the right of appeal under section 106 of the [Land TransportAct 1998](#)

## **5. Remedial action, suspension, revocation (sections 3.2(2) and 3.2(8) of the Rule)**

If, following an investigation, NZTA is satisfied that the HV certifier has failed to comply with any of the conditions of his appointment, NZTA may do one or more of the following:

- a) require that remedial action such as training or mentoring be undertaken by the HV certifier. The HV certifier cannot refuse to comply with the requirement
- b) suspend the HV certifier for a specified period or until conditions are met
- c) revoke the appointment of the HV certifier.

## **6. Immediate suspension or imposition of conditions (section 3.3(1) of the Rule)**

If NZTA has reason to believe that a HV certifier has failed to comply with a condition of his appointment and that this presents a significant risk to land transport safety, NZTA may suspend the appointment with immediate effect, or impose any conditions on the appointment of the HV certifier.

## **7. Notification of immediate suspension or imposition of conditions (section 3.3(2) of the Rule)**

When NZTA suspends the appointment, or imposes conditions on the appointment, NZTA will notify the HV certifier in writing of:

- a) the grounds for the suspension or imposing of conditions
- b) the fact that the certifier or organisation may make submissions to NZTA
- c) the right of appeal under section 106 of the [Land Transport Act 1998](#)

## **8. NZTA will consider submissions following immediate suspension or imposition of conditions (section 3.3(3) of the Rule)**

NZTA will, as soon as practicable, consider any submission made and notify the certifier or inspecting organisation in writing of the result of any such consideration.

## **9. Duration of immediate suspension or imposition of conditions (section 3.3(5) of the Rule)**

A suspension or condition imposed remains in force until NZTA has determined the action to be taken and that action has been taken.

## **10. Withdrawal of immediate suspension or imposition of conditions (section 3.3(4) of the Rule)**

NZTA may at any time withdraw a suspension or condition imposed.

## **11. Right of appeal against immediate suspension or imposition of conditions (section 3.3(6) of the Rule)**

A HV certifier may appeal under section 106 of the [Land Transport Act 1998](#) against a decision by NZTA to suspend immediately or to impose conditions.

## **12. Costs of investigations (sections 3.2(7) and 3.2(8) of the Rule)**

NZTA may require a HV certifier to bear the costs associated with an investigation or remedial action in accordance with any prescribed fee. **Refusal to bear the costs will be a breach of the Rule and the Notice(s) of Appointment and may result in further regulatory action.**

### **3.1.6 Consequences of termination or suspension**

Upon revocation or termination of the appointment for any reason whatsoever, whether in whole or part, the HV certifier will:

- a) cease provision of all or such part of the services under their appointment as may be required by NZTA
- b) return to NZTA or authorised representative or destroy as required by NZTA any **land transport documents (including unused LT400 forms)**, advertising and/ or display material featuring or referring to the services or the HV certifier's provision of the services under this appointment, as the case may be.

Upon suspension of appointment (whether in whole or part) of the HV certifier for any reason whatsoever, whether by NZTA or a duly authorised representative, the HV certifier shall immediately cease providing the relevant services during the period of suspension and shall, if so required, surrender all NZTA documents to NZTA or any authorised representative.

### 3.1.7 Disputes and appeals

Where there is any dispute arising between parties in relation to any matter arising out of the appointment, the parties shall endeavour to resolve such disputes promptly by consultation and negotiation in good faith.

- Where the HV certifier does not agree with any decisions of NZTA, including any decision or direction of a **Certification** Officer, the HV certifier **should**, notwithstanding any other rights they may have at law, seek from NZTA a review of that decision.
- Despite the previous two points, both parties recognise that NZTA has functions in respect of land transport safety and law enforcement and that, notwithstanding any dispute or appeal, NZTA may take whatever lawful action NZTA considers necessary in the interests of road safety. The specific reasons for the action taken will be provided.
- Where there is any dispute arising between the parties in relation to technical decisions, any available dispute resolution process described in the VIRM or in an issued HVS Memo may be invoked. This will permit the disclosure of otherwise privileged information, such as designs and PRS scores, to the adjudicating body, provided that this information is pertinent to the matter being judged.

Page amended **1 November 2021** (see [amendment details](#))

## 3-2 Disqualification from certification

A HV certifier must not engage in any activities that may conflict with his independence of judgement and integrity in relation to the services delivered.

A HV certifier may have a professional interest in a vehicle they certify, such as a vehicle:

- a) they have modified or repaired, or
- b) that has been modified or repaired by a person working for the same company as the HV certifier, and at the same premises,

However, a HV certifier may not certify a vehicle they or their immediate family have a personal ownership interest in.

A HV certifier may not certify an aspect of a vehicle for which he is not appointed.

An HVS certifier must not inspect a vehicle if:

- a) they do not hold a driver licence for that class of vehicle, and
- b) they are required to drive it.

## 3-3 Establishing whether a vehicle must be HV certified

A vehicle must be inspected for heavy vehicle specialist certification if:

- a) it requires certification for entry, re-entry or an in-service CoF
- b) it is a vehicle of one of the following classes:  
  
MD3, MD4, ME, NB, NC, TC, TD (see [Table 3-4-1. Vehicle equipment standards classifications](#))
- c) it has undergone modifications or qualifying repairs to:
  - i. chassis, structural bodywork, brakes, bolster attachments, towing connections, drive train, engine transmission, axles, load anchorages and wheels which affect compliance with applicable requirements (includes flood/water/fire damage)
  - ii. any item which could affect the vehicle's SRT

iii. corrosion in a structural part of the vehicle.

### 3.3.1 Repairs which do not require certification

The following types of repair do not require inspection and certification:

1. The replacement of bolted-on components covered by an existing certification which are identical and of the same, dimension, rating, and mounted in the same location.

- For clarity:

- replacement of identical, bolted fifth wheels, bolted kingpins, bolted tow eyes and bolt-on tow couplings do not require certification
- replacement of components which normally require certification and may be bolted or considered bolted such as log bolsters and attachments, draw beams, drawbars, skid plates, welded structures and other similar items require certification
- if a repair requires welding to be conducted, then certification is likely required
- replacing bolted components (only) does not supersede, extend, or increase any certified expiry or rating.

2. Repairs to the first failures of chassis cross-members, if that cross-member is not

- a) the first or last cross-member of the chassis
- b) fitted within 500mm of a suspension support
- c) fitted with a driveshaft centre bearing
- d) supporting a:
  - i. ball-race turntable
  - ii. tow coupling
  - iii. bolster attachment
  - iv. device that may place a concentrated load on to the chassis, for example a hoist or a hydraulic cylinder of a tipping body.

3. Repairs to coaming rails that do not support certified load anchorage points.

4. Tow-eyes fitted to the front of a vehicle for recovery purposes.

5. repairs to non-structural components only of a vehicle's monocoque body, for example bolt-on body panels.

6. Ferry tie down points that are attached using existing holes in the chassis and are not welded to components that require certification in themselves.

### 3.3.2 Certifications that require an LT400, but no statement of design compliance

The following is a list of tasks that certifying manufacturers can undertake without getting a statement of design compliance from a certifying engineer:

1. Repairs to existing certified load anchorages that are of a standard design from NZS5444, certified to this standard, and repaired using the method outlines in NZS5444. The repair must restore the same certified design in accordance with the requirements of NZS5444 and be certified to the Land Transport Rule: Vehicle Repair 1998.

2. A single rear steering axle fitted to a new quad axle semi-trailer certified in accordance with the Land Transport Rule: Vehicle Dimensions and Mass 2016.

3. A retractable axle fitted to a new trailer certified in accordance with the Land Transport Rule: Vehicle Dimensions and Mass 2016.

4. Other items as defined in the [manufacturing certifier section](#) of this manual.

## Notes

- Identical replacement of some bolted components may not require certification but in some circumstances, certification can be requested (for example, when a vehicle inspector considers a vehicles safety performance has been affected). If no modification or repair has taken place and safe performance hasn't been affected, then a professional letter or statement can be issued by an HVEx certifier.
- The certifier is required to inspect the surrounding structure (system load path) in conjunction with the repair/replacement and extra care shall be taken in cases of repair/replacement due to damage to identify root cause.
- Repairs must use identical replacement components of the same dimensions and be fitted in the same location as originally certified.

### 3.3.3 Repairs that require both an LT400 and a statement of design compliance

All other repairs to heavy vehicle chassis, towing connections, log bolsters and load anchorages require input from a certifying engineer and therefore require a statement of design compliance before an LT400 can be issued by a manufacturing certifier, except where specifically allowed for in the manufacturing certifier section of this manual

Page amended **30 July 2025** (see [amendment details](#))

## 3-4 Identifying the vehicle class

Since some decisions are made according to the class of the vehicle, the HV certifier must be able to identify the class of the vehicle to be inspected. The following table describes vehicle classes.

**Table 3-4-1. Vehicle equipment standards classifications**

Class	Description
<p><b>AA (Pedal cycle)</b></p>	<p>A vehicle designed to be propelled through a mechanism solely by human power.</p>
<p><b>AB (Power-assisted pedal cycle)</b></p>	<p>A pedal cycle to which is attached one or more auxiliary propulsion motors having a combined maximum power output not exceeding 300 watts.</p>
<p><b>LA (Moped with two wheels)*</b></p>	<p>A motor vehicle (other than a power-assisted pedal cycle) that:</p> <ul style="list-style-type: none"> <li>• has two wheels; and</li> <li>• either: <ul style="list-style-type: none"> <li>○ has an engine cylinder capacity not exceeding 50ml and a maximum speed not exceeding 50km/h; or</li> <li>○ has a power source other than a piston engine and a maximum speed not exceeding 50km/h.</li> </ul> </li> </ul>
<p><b>LB (Moped with three wheels)</b></p>	<p>A motor vehicle (other than a power-assisted pedal cycle) that:</p> <ul style="list-style-type: none"> <li>• has three wheels; and</li> <li>• either: <ul style="list-style-type: none"> <li>○ has an engine cylinder capacity not exceeding 50ml and a maximum speed not exceeding 50km/h; or</li> <li>○ has a power source other than a piston engine and a maximum speed not exceeding 50km/h.</li> </ul> </li> </ul> <p>An LB 1 motor vehicle has one wheel at the front and two wheels at the rear. An LB 2 motor vehicle has two wheels at the front and one wheel at the rear.</p>
<p><b>LC (Motorcycle)</b></p>	<p>A motor vehicle that:</p> <ul style="list-style-type: none"> <li>• has two wheels; and</li> <li>• either: <ul style="list-style-type: none"> <li>○ has an engine cylinder capacity exceeding 50ml; or</li> <li>○ has a maximum speed exceeding 50km/h.</li> </ul> </li> </ul>
<p><b>LD (Motorcycle and side-car)</b></p>	<p>A motor vehicle that:</p> <ul style="list-style-type: none"> <li>• has three wheels asymmetrically arranged in relation to the longitudinal median axis; and</li> <li>• either: <ul style="list-style-type: none"> <li>○ has an engine cylinder capacity exceeding 50ml; or</li> <li>○ has a maximum speed exceeding 50km/h.</li> </ul> </li> </ul>

Class	Description
<b>Side-car</b>	A car, box or other receptacle attached to the side of a motorcycle and supported by a wheel.
<b>LE (Motor tri-cycle)</b>	<p>A motor vehicle that:</p> <ul style="list-style-type: none"> <li>• has three wheels symmetrically arranged in relation to the longitudinal median axis; and</li> <li>• has a gross vehicle mass not exceeding one tonne; and</li> <li>• either: <ul style="list-style-type: none"> <li>◦ has an engine cylinder capacity exceeding 50ml; or</li> <li>◦ has a maximum speed exceeding 50km/h.</li> </ul> </li> </ul> <p>An LE 1 motor vehicle has one wheel at the front and two wheels at the rear. An LE 2 motor vehicle has two wheels at the front and one wheel at the rear.</p>
<b>Passenger vehicle</b>	<p>A motor vehicle that:</p> <ul style="list-style-type: none"> <li>• is constructed primarily for the carriage of passengers; and</li> <li>• either: <ul style="list-style-type: none"> <li>◦ has at least four wheels; or</li> <li>◦ has three wheels and a gross vehicle mass exceeding one tonne.</li> </ul> </li> </ul>
<b>MA (Passenger car)</b>	A passenger vehicle (other than a class MB or class MC vehicle) that has not more than nine seating positions (including the driver's seating position).
<b>MB (Forward control passenger vehicle)</b>	<p>A passenger vehicle (other than a class MC vehicle):</p> <ul style="list-style-type: none"> <li>• that has not more than nine seating positions (including the driver's seating position); and</li> <li>• in which the centre of the steering wheel is in the forward quarter of the vehicle's total length.</li> </ul>

Class	Description
<b>MC (Off-road passenger vehicle)</b>	<p>A passenger vehicle, designed with special features for off-road operation, that has not more than nine seating positions (including the driver's seating position), and that:</p> <ul style="list-style-type: none"> <li>• has four-wheel drive; and</li> <li>• has at least four of the following characteristics when the vehicle is unladen on a level surface and the front wheels are parallel to the vehicle's longitudinal centre-line and the tyres are inflated to the vehicle manufacturer's recommended pressure: <ul style="list-style-type: none"> <li>◦ an approach angle of not less than 28 degrees;</li> <li>◦ a breakover angle of not less than 14 degrees;</li> <li>◦ a departure angle of not less than 20 degrees;</li> <li>◦ a running clearance of not less than 200mm;</li> <li>◦ a front-axle clearance, rear-axle clearance or suspension clearance of not less than 175mm.</li> </ul> </li> </ul>
<b>Omnibus</b>	<p>A passenger vehicle that has more than nine seating positions (including the driver's seating position). An omnibus comprising two or more non-separable but articulated units shall be considered as a single vehicle.</p>
<b>MD (Light omnibus)</b>	<p>An omnibus that has a gross vehicle mass not exceeding 5 tonnes.</p>
<b>MD 1</b>	<p>An omnibus that has a gross vehicle mass not exceeding 3.5 tonnes and not more than 12 seats.</p>
<b>MD 2</b>	<p>An omnibus that has a gross vehicle mass not exceeding 3.5 tonnes and more than 12 seats.</p>
<b>MD 3</b>	<p>An omnibus that has a gross vehicle mass exceeding 3.5 tonnes but not exceeding 4.5 tonnes.</p>
<b>MD 4</b>	<p>An omnibus that has a gross vehicle mass exceeding 4.5 tonnes but not exceeding 5 tonnes.</p>
<b>ME (Heavy omnibus)</b>	<p>An omnibus that has a gross vehicle mass exceeding 5 tonnes.</p>
<b>Goods vehicle</b>	<p>A motor vehicle that:</p> <ul style="list-style-type: none"> <li>• is constructed primarily for the carriage of goods; and</li> <li>• either: <ul style="list-style-type: none"> <li>◦ has at least four wheels; or</li> <li>◦ has three wheels and a gross vehicle mass exceeding one tonne.</li> </ul> </li> </ul>

Class	Description
	<p>For the purpose of this description:</p> <ul style="list-style-type: none"><li>• a vehicle that is constructed for both the carriage of goods and passengers shall be considered primarily for the carriage of goods if the number of seating positions multiplied by 68kg is less than 50 percent of the difference between the gross vehicle mass and the unladen mass</li><li>• the equipment and installations carried on special purpose vehicles not designed for the carriage of passengers shall be considered to be goods</li><li>• a goods vehicle that has two or more non-separable but articulated units shall be considered to be a single vehicle.</li></ul>

Class	Description
<b>NA (Light goods vehicle)</b>	A goods vehicle that has a gross vehicle mass not exceeding 3.5 tonnes.
<b>NB (Medium goods vehicle)</b>	A goods vehicle that has a gross vehicle mass exceeding 3.5 tonnes but not exceeding 12 tonnes.
<b>NC (Heavy goods vehicle)</b>	A goods vehicle that has a gross vehicle mass exceeding 12 tonnes.
<b>Trailer</b>	A vehicle without motive power that is constructed for the purpose of being drawn behind a motor vehicle.
<b>TA (Very light trailer)</b>	A single-axled trailer that has a gross vehicle mass not exceeding 0.75 tonnes.
<b>TB (Light trailer)</b>	A trailer (other than a class TA trailer) that has a gross vehicle mass not exceeding 3.5 tonnes.
<b>TC (Medium trailer)</b>	A trailer that has a gross vehicle mass exceeding 3.5 tonnes but not exceeding 10 tonnes.
<b>TD (Heavy trailer)</b>	A trailer that has a gross vehicle mass exceeding 10 tonnes.

### 3-5 Work procedure

Any work, to which this manual applies, to be done on a vehicle, must be:

- specified correctly
- designed correctly
- manufactured correctly
- certified as within safe tolerance of the original design or specification.

The design of the work by a HV engineer certifier, where the manufacture and installation is to be the responsibility of others, is to be accompanied by a **Statement of Design Compliance (SoDC)** that is signed by the HV engineer certifier.

The specification of the work is set out in the **Procedure Documentation Sheet (PDS)** that is drawn up by an HV certifier.

- Each certification must have its own unique PDS.

Manufacturing and installation work must also be monitored or verified by an HVS certifier. Where appropriate, the certification of manufacture may be done by a form of 'type approval'.

Final certification is based on inspection by a qualified certifier with reference to any intermediate documents, including the SoDC, the PDS, supporting documentation from any delegated tasks, any applicable standards, documented histories of used components and worksheets and calculations.

Figure 3-5-1. Certification process: Engineer certifier


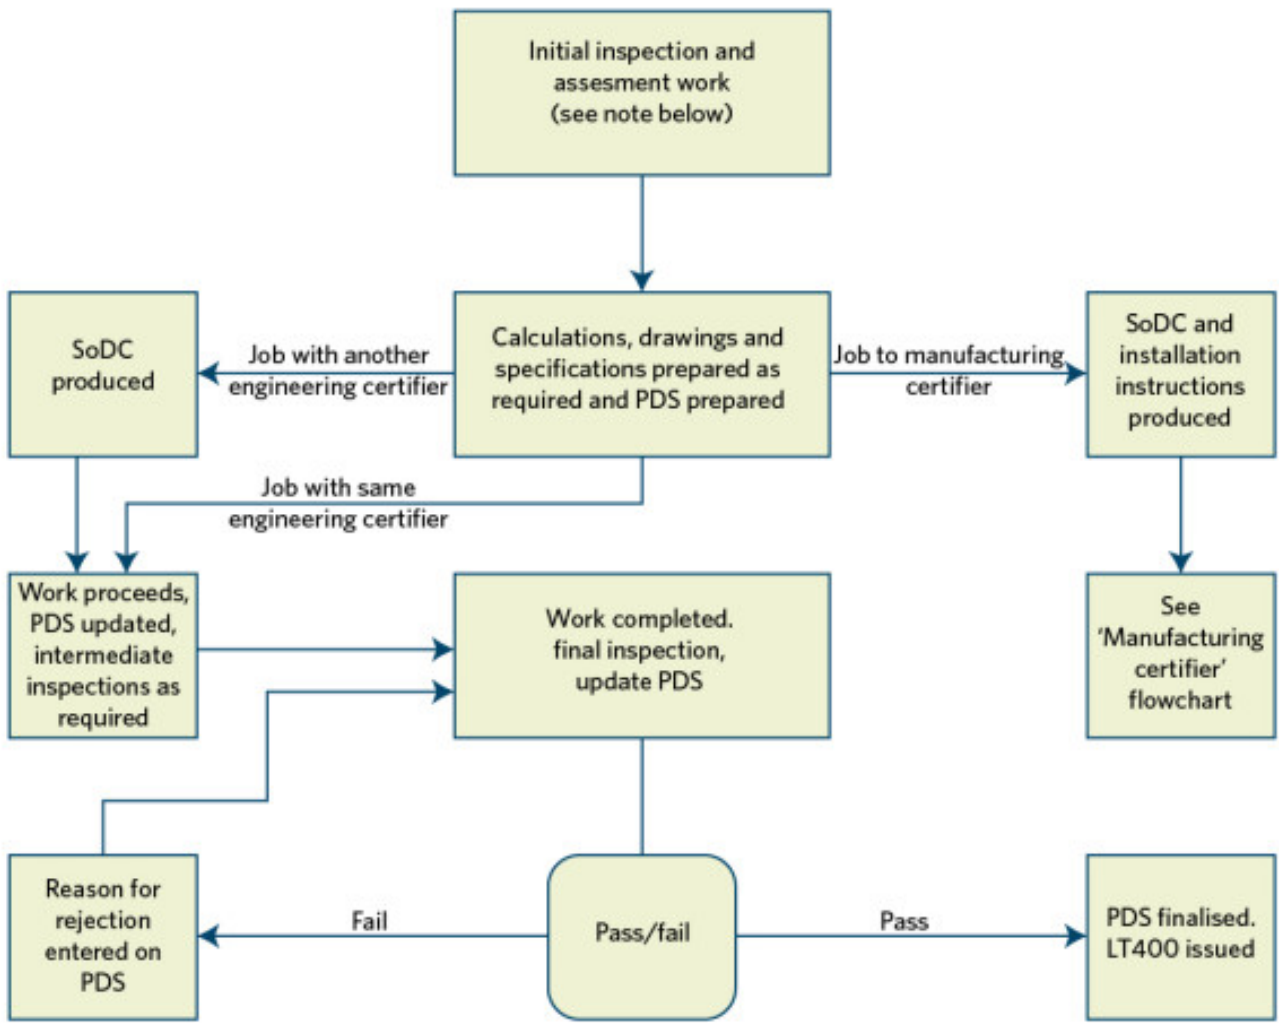


Figure 3-5-2. Certification process: Manufacturing certifier

(see Note 1)

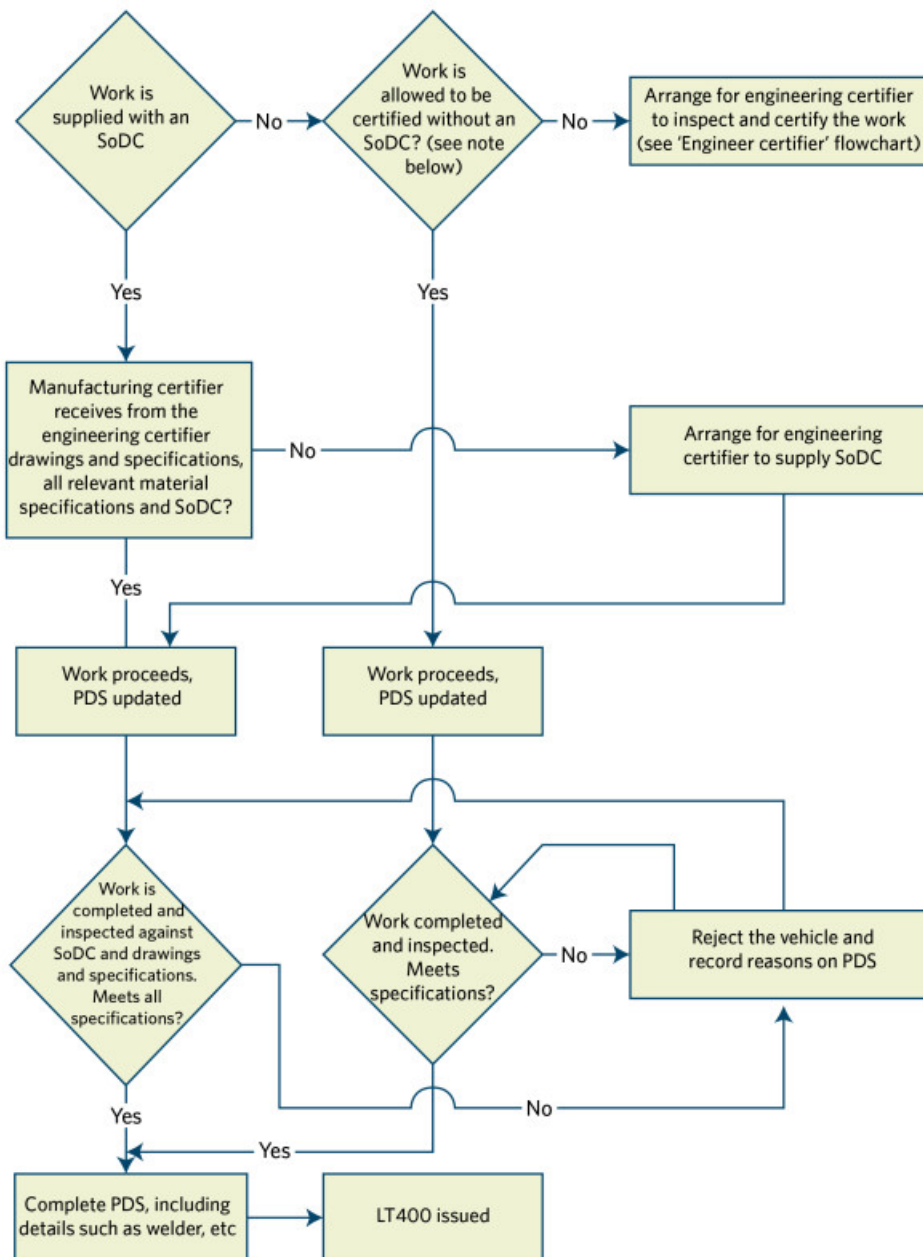

### Note 1

The following work is allowed to be completed by a manufacturing certifier without a SoDC.

- Load anchorages that are of a standard design from NZS5444, certified to this standard and repaired using the method outlined in NZS5444
- Worn or damaged fifth wheels replaced according to the fifth wheel manufacturer's instructions for replacing bolt on components
- Worn or damaged kingpins replaced according to the kingpin manufacturer's instructions on replacement
- Work certified by the HV certifier who has designed it.

Other work that may be certified by a HV manufacturing certifier is defined in the manufacturing certifier section of this manual.

## How many certificates?

Each aspect of the vehicle that requires certification is to be certified separately and issued with a separate LT400. This means that any vehicle may need multiple certificates before it can qualify for a CoF (refer to [Technical bulletin 15](#)).

### 3.5.1 The statement of design compliance (SoDC)

The SoDC must include the name and signature of the certifier and the date of certification. The SoDC

must also have sections with information relevant to:

- the class of motor vehicle
- the vehicle description
- vehicle identifiers
- certification.

The SoDC must include information relevant to the purpose of specialist certification, for example:

- modifications
- repair
- vehicle dimensions
- matters relevant to the structure, systems, components or equipment of a vehicle or installation or use of a vehicle's structure, systems, components or equipment
- alternative fuel system
- age or historic nature of a vehicle
- class of vehicle
- any other attribute of a vehicle.

The SoDC must confirm that the vehicle, or any aspect of it relevant to the purpose of specialist certification, complies with the requirements as specified in [Land Transport Rule: Vehicle Standards Compliance 2002](#), and therefore must include the following statement:

*I declare that I am a heavy vehicle specialist certifier – engineer and I hold a current valid appointment. I certify that this vehicle component design and this certification comply in all respects with the Land Transport Rule: Vehicle Standards Compliance 2002; my Notice of Appointment and applicable requirements. To the best of my knowledge the information contained in this certificate is true and correct.*

The SoDC must include drawing numbers and may include other relevant details.

HV manufacturing certifiers shall not accept an SoDC that does not contain the information outlined in the *Gazette* notice published during the week of 21 August 2000.

HV manufacturing certifiers shall not accept an SoDC from an HV certifying engineer who has ceased to practice. An SoDC issued by that person can no longer be considered valid as the HV certifying engineer does not hold a current appointment.

Consequently, any item or component manufactured using a SoDC from a non-practicing HV certifying engineer cannot be signed off by an HV manufacturing certifier, but must be re-certified by a current HV certifying engineer of the appropriate category.

SoDCs must be specific to individual vehicles and clearly identify the VIN/chassis number. SoDCs cannot be used for 'type' or 'model' approval of generic designs.

### 3.5.2 Issuing a professional letter or statement

Engineering certifiers may be asked for opinion on a component where it is determined that a LT400 is not required. This may include situations where a clean and treat is required, or inspection of damage recorded where certification is not yet required.

Where an LT400 **is not required**, the professional opinion should be on your company letterhead and should contain:

- vehicle details
- date of inspection
- details of the area assessed
- recording of any damage and any treatment completed
- effect on the vehicle's/components integrity and/or safety performance in relation to GVM/ratings
- your details, including category and ID
- the date and sign the document.

Page amended 1 April 2023 (see [amendment details](#))

## 3-6 Establishing whether the vehicle aspect complies

### Certifications by an engineer certifier

1. Start a Procedure Documentation Sheet (PDS) for the vehicle.
2. Inspect the vehicle to be certified at a location that allows adequate access and equipment to allow a full and detailed inspection.
3. Record all relevant details and dimensions for the proposed or existing aspect of the vehicle that requires certification.
4. Collect all relevant information that is required for the certification of that vehicle aspect.
5. Compare what the vehicle owner/workshop wants to do with the relevant sections of the VIRM and

ensure that no reasons for rejection will be invoked. If they are, the HV certifier should advise the owner/workshop in writing and detail the options.

6. Complete design drawings, specifications and calculations as required.
7. Complete a Statement of Design Compliance, if required (see [section 3.5](#)), and supply it as well as all drawings and specifications required to complete the proposed work to the workshop/vehicle owner. Such information should include dimensions, materials and welding specifications.
8. Supply any drawings and specifications required to complete the proposed work to the workshop/vehicle owner. Such information should include dimensions, materials and welding specifications as well as an inspection schedule from the HV certifier.
9. Carry out inspections of the work as required. If the vehicle is presented fully completed, disassembly of certain parts may be required at the discretion of the HV certifier. Compare the work against the requirements of the design drawings and specifications provided. The inspection should include the quality of materials and workmanship.
10. Compare the finished work and documentation against the VIRM for reasons for rejection and if any of the reasons for rejection apply, reject the vehicle for certification.

11. If the HV certifier requires further information in order to determine compliance with the requirements, he must reject the vehicle until the information has been obtained.

12. Complete the PDS and issue an LT400 for the aspect that has been certified if no reasons for rejection exist.

### **Certifications by manufacturing certifier**

1. Start a PDS for the vehicle.
2. Inspect the vehicle to be certified at a premises that allows adequate access and equipment to allow a full and detailed inspection.
3. Inspect the vehicle against the Statement of Design Compliance, if required (see [section 3.5](#)), issued by a HV engineer certifier or against one of the approved pre engineered solutions. The inspection should include materials and workmanship.
4. Collect any relevant supporting documentation.
5. Compare the inspection results against the VIRM for reasons for rejection and if any exist, reject the vehicle for certification.
6. Complete the PDS and issue an LT400 for the aspect that has been certified if no reasons for rejection exist.

## **Prerequisite documentation**

### **Certifications by engineer**

1. Designs for the work involved in the vehicle aspect.
2. Statement of Design Compliance or LT400 signed by an HV Specialist Certifying Engineer for that aspect.
3. PDS.

### **Certifications by local manufacturer**

1. Designs for the work involved in the vehicle aspect, where this involves the chassis, drawbar, drawbeam, heavy vehicle brakes or log bolsters.
2. Statement of Design Compliance or reference to pre engineered solutions, for the work involved in the vehicle aspect.
3. PDS.

## **3-7 Record of certification**

1. The HV certifier must complete a Heavy Vehicle Specialist Certificate (LT400).

2. The HV certifier must include the Vehicle Identification Number (VIN) on the LT400.

3. The HV certifier must retain one copy of the LT400.

4. The HV certifier must provide one copy of the LT400 to the owner of the vehicle.

5. The HV certifier must hold all documentary evidence involved in the certification process.

One LT400 is required for each aspect of the vehicle that needs to be certified. If a single certifier who is appointed for more than one aspect of a vehicle certifies more than one aspect of the vehicle at the same time, a separate LT400 must be used for each aspect.

For some aspects of the vehicle an additional record of the determination, such as a component identification, usually in the form of a metal plate, must be issued and fixed to the vehicle. For some items, this identification may be impressed directly on to the item.

While a certifier may include an expiry date on the certification documents or certification records (eg identification plates), they are only valid if they are required by the legislation or the standard they are manufactured to, or are required by NZTA. If they are not specifically required they are not to be recorded in Landata (Where expiry dates are not specifically required by the legislation, the standard or NZTA then any certification carried out will be for the life of the vehicle).

Any vehicles or components certified after 1 December 2016 must contain the following information (on the plate or label) as a minimum:

**Table 3-6-1. Data on plates and labels**

Aspect	Minimum data on a plate
Drawbars and drawbeams	<ul style="list-style-type: none"> <li>• Compliance certificate number (LT400)</li> <li>• Certifier's ID</li> <li>• Manufacturer or certifier's ID</li> <li>• VIN or vehicle chassis number (Note 1)</li> <li>• Maximum towed mass</li> <li>• Expiry date</li> <li>• Maximum vertical load (if applicable) Drawbar length (if applicable)</li> </ul>
Log bolster	<ul style="list-style-type: none"> <li>• Compliance certificate number (LT400)</li> <li>• Certifier's ID</li> <li>• VIN or vehicle chassis number (Note 1)</li> <li>• Number of bolsters fitted</li> <li>• Type of bolster attachments</li> <li>• Bolster rating</li> <li>• Expiry date</li> </ul>
Load anchorages and headboard	<ul style="list-style-type: none"> <li>• Compliance certificate number (LT400)</li> <li>• Certifier's ID</li> <li>• VIN or Vehicle chassis number (Note 1)</li> <li>• Anchorage type</li> <li>• Anchorage rating</li> <li>• Number of anchorages fitted</li> <li>• ID of the load anchorage manufacturer</li> </ul>
Brake code  (only where brake code is approved for re-certification)	<ul style="list-style-type: none"> <li>• Compliance certificate number (LT400)</li> <li>• Certifier's ID</li> <li>• The words 'NZHVBC Edition No.'</li> <li>• The edition of the Brake Code used to certify the vehicle</li> <li>• Size of the brake chambers</li> <li>• Effective length of slack adjusters</li> <li>• Size of the tyres at certification</li> <li>• Grade of lining material used</li> </ul>
PSV roof rack	<ul style="list-style-type: none"> <li>• Purpose of the roof rack if other than for general baggage</li> <li>• Maximum weight it is allowed to carry</li> <li>• Manufacturer's name</li> <li>• Vehicle ID (VIN/chassis number and LT400 number if the roof rack has been rated and certified for use on a particular vehicle model) (Note 1)</li> </ul>

## Replacement plates

If a plate becomes illegible, damaged or lost it may be replaced provided that:

- the information that was on the plate can be determined from the original documentation, and
- visual inspection of the plated item shows it remains in a safe condition, and
- it is the original item.

### Note 1

VIN is the primary vehicle identifier required and chassis number is acceptable only if the vehicle does not have a VIN.

Page amended **9 April 2018** (see [amendment details](#))

## 3-8 Collecting fees

The [Land Transport \(Certification and Other Fees\) Regulations 1999](#), regulations 5 and 8 stipulate that the fee that may be charged by an HV certifier for the certification of a vehicle is an amount determined by the individual HV certifier having regard to:

- a) the time spent in inspecting the vehicle to ascertain whether it complies with the relevant requirements
- b) any fees payable to NZTA
- c) any standard or usual rate at which the HVS certifier charges for other work carried out in respect of motor vehicles.

## 3-9 Documentation of heavy vehicle specialist certification

The following table defines the minimum file content that should be present in any HVSC certification file. In addition to the listed minimum requirements, all files should contain sufficient information such that another HVSC can

independently verify the certification decision.

Required items	Certifier categories		
	<b>HVEA, HVET, HVEC, HVEL, HVEK</b>	<b>HMAD, HMTD, HMCD, HMLD, HMKD</b>	<b>HVS1, HVS2, HVS3, HVP1, HVP2</b>
PDS (identifying the vehicle, work carried out/certified, and the standards used)	?	?	?
LT400 (SODC if applicable)	?	?	?
Inspection notes and sketches	?	?	?
Photographs showing: <ul style="list-style-type: none"> <li>• the entire vehicle, VIN and plate (if registered)</li> <li>• detailed views of the components</li> <li>• build/repair progress ( if applicable)</li> <li>• the vehicle/component condition before repair (if applicable)</li> <li>• final inspection after all work completed</li> <li>• component rating and serial numbers* (if applicable)</li> </ul>	?	?	?
Material specifications	?	?	
Calculations	?		?
Hubometer history and residual life assessment (for drawbar and drawbeam recertifications only)	?		?
Drawings/fabricator instructions	?		
Proprietary component data	?	?	
Welder qualifications (positions and techniques)	?	?	

Evidence of design that was followed, ie one of: <ul style="list-style-type: none"> <li>• SoDC/DC and drawings</li> <li>• NZTA pre-approved solution (MRCoP)</li> <li>• A repair of a load anchor design from NZS 5444</li> <li>• Manufacturers fitting instructions for replacement fifth wheel or kingpin</li> <li>• Design Certificate and drawings</li> </ul>		?	
Vehicle information, eg data sheets, bodybuilder guide, vehicle history from LANDATA if already registered, et	?	?	
Welding/bolting procedures as appropriate		?	
NDT records as required		?	

Page added 9 December 2019 (see [amendment details](#))

## 4 Complaints

**Customers should be encouraged to direct any complaints to the HV certifier in the first instance.**

To ensure that all written complaints are investigated, the HV certifier must maintain an effective complaints management process, which must provide:

1. a clear and concise statement that recognises the positive value of complaints.
2. clear and concise instructions to all customers on how to register a complaint. This can be accomplished in several ways, for example:
  - a) a conspicuous notice on the workplace wall, or
  - b) a clear statement on any receipt or invoice issued, or
  - c) a clear statement on the HVS certifier's checksheet
3. a straightforward explanation of the expected standards for resolution and the customer's right to appeal to NZTA if the proposed resolution is unsatisfactory
4. identification of the complainant and should address specific concerns about the service provided.
5. full documentation of each complaint processed, in accordance with the NZTA [Model QMS](#), to enable subsequent investigation
6. acknowledgement in writing within three working days of any written complaint
7. a proposed resolution to the complainant within 20 working days of the complaint being made.
8. a record of each complaint, in accordance with the NZTA [Model QMS](#)

9. a clear direction to the NZTA helpdesk 0800 699 000 if a customer wishes to make a complaint or appeal a decision made by an HV certifier, or the complaint refers to legislation or NZTA policy.

**Note:** complaints must be in writing.

## 5 Inspection premises and equipment

The HV certifier must ensure that the premises used for the inspection and certification of modifications and repairs comply with the applicable requirements in this section.

HV certifiers who do not have their own premises should make their inspections on premises as described below.

### 5.1 Premises and equipment specifications

The HV certifier must use an inspection area that:

- a) enables a safe and thorough inspection
- b) is provided with sufficient lighting to enable good visibility of the vehicle being certified and the equipment used in the inspection process
- c) have available suitable, calibrated equipment for the inspection being carried out.

### 5.2 Compliance with statutory requirements

The HV certifier must not carry out inspections if the premises and equipment do not comply with:

- Occupational Safety and Health requirements
- any other relevant Acts, regulations and local bylaws, as they apply to him or his business.

## 6 Appointments

Information on applying to be a heavy vehicle specialist certifier (HVSC) can be found in the Vehicle Inspection Portal Applications section.

[Vehicle Inspection Portal HVSC Applications section](#)

# 7 Sample certification documents



## Heavy vehicle specialist certificate

Must be presented to a CoF (heavy) inspecting organisation if not entered into LANDATA

Heavy vehicle specialist inspector's or manufacturing inspecting organisation's name (PRINT IN CAPS)  ID

Plate number (optional)  VIN/chassis number

Make  Component being certified:  Chassis  Load anchorage

Model (optional)   Log bolsters  Towing connection  Brakes

Certification category   SRT  PSV stability  PSV rollover

Swept path  PBS

Description of work

Code/standard/rule certified to  Component load rating(s)

General drawing number(s)

Supporting documents

Special conditions (optional)

Certification expiry date (if applicable)  **OR** Hubodometer reading (whichever comes first)

### Declaration

I the undersigned, declare that I am the heavy vehicle specialist inspector identified and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule: Vehicle Standards Compliance 2002 and my appointment. To the best of my knowledge the information contained in the certificate is true and correct.

Designer's ID (if different from inspector below)

Inspector's signature

Inspector's name (PRINT IN CAPS)  ID number

Date  Number

CoF vehicle inspector ID (if applicable)  CoF vehicle inspector signature (if applicable)  Date



All fields are mandatory unless otherwise stated.

## 8 Definitions and abbreviations

<b>Agricultural trailer</b>	means a trailer constructed to be operated in connection directly with the operation or management of a farm but does not include a logging trailer.
<b>Appointment</b>	means the appointment by NZTA of the HV Certifier under the Notice of Appointment (NoA) and pursuant to <a href="#">Land Transport Rule Vehicle Standards Compliance 2002</a> .
<b>Applicable requirement</b>	means any requirement specified in an Act, Regulation or Rule that applies to a specific vehicle.
<b>Approved vehicle standard</b>	means a vehicle standard with which a vehicle is required to comply by an applicable requirement.
<b>Articulated vehicle</b>	means any motor vehicle with a semi-trailer attached, so that part of the semi-trailer is superimposed on the motor vehicle and a substantial part of the mass of the semi-trailer and of its load is borne by the motor vehicle.
<b>Aspect of a vehicle for heavy vehicle certification</b>	means an aspect of the vehicle which belongs within certifier categories. These include chassis and frame structures, towing connections, load anchorages, bolster attachments, brakes and SRT.
<b>Axle</b>	<p>means one or more shafts, spindles or bearings in the same vertical transverse plane by means of which, in conjunction with wheels mounted on those shafts, spindles or bearings, a portion of the weight of the vehicle is transmitted to the roadway, and:</p> <ul style="list-style-type: none"> <li>a) if two or more wheels of a motor vehicle are substantially in the same line transversely and some or all of them have separate axles, the axles of all those wheels are to be treated as one axle</li> <li>b) if the longitudinal centreline of an axle of a motor vehicle is less than 1m distant from the longitudinal centreline of another axle, the two axles are to be treated as one axle ('a dual axle').</li> </ul>
<b>Axle mass</b>	<p>means the lesser of:</p> <ul style="list-style-type: none"> <li>a) the maximum mass that can be carried by the axle, including the mass of the axle, as determined by the axle manufacturer, or</li> <li>b) the maximum mass that can be carried by the suspension system, including the mass of the axle, as determined by the suspension system manufacturer.</li> </ul>
<b>Axle set</b>	means a single-axle set, a tandem-axle set, a twin-steer axle set, a tri-axle set, or a quad-axle set.
<b>Axle-stop device</b>	means a device to control the movement of the axle in the event of suspension failure.

<b>Ballrace turntable</b>	means a device incorporating a low friction ball bearing fitted between two substantial structural components of a vehicle to enable rotational motion between those components about a vertical axis.
<b>Body</b>	means the part of the vehicle that is designed for the use and accommodation of the occupants or to hold any goods.
<b>Bolster Attachment Code</b>	means the Bolster Attachment Code of the Log Transport Safety Council, approved by NZTA.
<b>Brake control assembly</b>	means an assembly containing the brake pedal assembly, the master cylinder or treadle valve, and associated components.
<b>Brake pedal assembly</b>	means an assembly containing the brake pedal and pedal pivot, pedal bracket, pedal return spring and associated components.
<b>Cab-guard</b>	means a structure attached to a vehicle that provides protection to the cab occupants from the effects of load impact, and may include a headboard.
<b>Certificate of loading</b>	means a certificate of loading issued under any regulation or rule made under the <a href="#">Land Transport Act 1998</a>
<b>Certify</b>	means in relation to a vehicle, or specific aspect of a vehicle, to make a record of determination under 6.6(1)(a) or 7.6(1)(a) that confirms that the vehicle inspector or inspecting organisation has determined that the vehicle or specific aspect of the vehicle complies with the applicable requirements.
<b>Chassis</b>	means the structural lower part of a vehicle to which the running gear and, as applicable, engine, transmission, steering system and body may be attached.
<b>Chassis assembly</b>	means a chassis with running gear attached and, as applicable, engine, transmission and steering system attached.

<b>Chassis rating</b>	<p>means:</p> <p>a) for a vehicle first registered before 1 February 1989 that has not been modified on or after</p> <p>1 April 2005, a set of data, containing the gross vehicle mass, gross combination (if applicable) and maximum towed mass (if applicable), approved or determined by NZTA or a person appointed by NZTA</p> <p>b) for a vehicle first registered on or after 1 February 1989 or a vehicle that has been modified on or after 1 April 2005, a set of data, containing the permitted maximum axle and/or axle-set masses, gross vehicle mass, gross combination mass (if applicable) and maximum towed mass (if applicable), approved or determined by NZTA or a person appointed by NZTA.</p>
<b>Class</b>	in relation to vehicles, means a category of vehicle of one of the groups A, L, M, N and T, as specified in Table A in <a href="#">Land Transport Rule Heavy Vehicles 2004</a>
<b>Combination vehicle</b>	means a towing vehicle in combination with one or more trailers or other motor vehicle that is being towed.
<b>Compliance label</b>	means an attachment to the vehicle in the form of a label that confirms compliance with applicable requirements.
<b>Construction</b>	means the manufacture, assembly, reassembly or modification of a vehicle and includes all acts and activities related or incidental to the construction of a vehicle.
<b>Coupling</b>	means that part of a vehicle that is specifically designed to enable it to be connected to another vehicle; does not include a structural member of the towing or towed vehicle.
<b>De-registered</b>	means that a vehicle's New Zealand registration has been cancelled in accordance with the <a href="#">Land Transport Act 1998</a>
<b>Drawbar</b>	means an assembly of components that includes: the trailer coupling that connects the trailer to the coupling of the towed vehicle; hinges (where applicable); the structural and other related components between the trailer coupling and trailer bogie or chassis.
<b>Drawbeam</b>	means the part of the towing vehicle to which a coupling is fitted to enable a heavy trailer to be connected and includes the attached coupling.
<b>Dual steering</b>	in relation to a vehicle, means the vehicle is able to be steered from both the left-hand and right-hand side of the vehicle.

<b>EBS</b>	<p>means electronically controlled braking system. Refer to the Land Transport Rule: Heavy Vehicle Brakes 2006 for further information.</p> <p><u>Land Transport Rule: Heavy Vehicle Brakes 2006</u></p>
<b>Enter service</b>	<p>in relation to a vehicle means to begin to be operated in-service for the first time. For Public Service Vehicles the date of entry refers to the most recent entry or re-entry. For other vehicles the date of entry is the date of the first entry into the New Zealand fleet.</p>
<b>Evidence of vehicle inspection</b>	<p>has the same meaning as in the Act and the Rule.</p>
<b>Fifth wheel</b>	<p>means a device fitted to a vehicle to enable a semi-trailer to be connected to it by means of a kingpin so that the semi-trailer may be towed.</p>
<b>Fit and proper</b>	<p>has the meaning ascribed to it in Section 2 of the Rule.</p>
<b>Force Majeure</b>	<p>means any cause beyond the reasonable control of the party claiming its benefit and which that party is unable to overcome by the exercise of reasonable diligence.</p>
<b>g</b>	<p>means an acceleration of <math>9.81\text{m/s}^2</math>.</p>
<b>Goods</b>	<p>means all kinds of movable property; includes articles sent by post and animals.</p>
<b>Gross combination mass</b>	<p>means, for a vehicle that is permitted to tow another vehicle, the maximum permitted combined mass of the towing vehicle and any combination of attached trailers or vehicles, determined by the vehicle manufacturer and approved by NZTA, or determined by NZTA.</p>
<b>Gross mass</b>	<p>in relation to any vehicle or combination vehicle, means the mass of that vehicle and its load, equipment and accessories, which may be determined by adding the mass on the vehicle's axles or axle sets.</p>
<b>Gross vehicle mass</b>	<p>means either:</p> <ul style="list-style-type: none"> <li>a) the maximum permitted mass of a vehicle, which includes the mass of the accessories, the crew, the passengers and load, and is, unless (b) applies, the gross vehicle mass specified (subsequent to the latest modification, if any) by the manufacturer of the vehicle, or</li> <li>b) if a person approved for the purpose by NZTA determines that the gross vehicle mass should differ from that specified by the manufacturer, taking into account evidence on the capability of the systems and components of the vehicle, or the effects of any modification, that mass determined by that person.</li> </ul>

<b>Headboard</b>	means the substantially vertical part of the forward end of a flat deck or curtain-sided body of a vehicle.
<b>Heavy motor vehicle</b>	means a motor vehicle that: <ul style="list-style-type: none"> <li>a) is of class MD3, MD4, ME, NB, NC, TC or TD, or</li> <li>b) has a gross vehicle mass that exceeds 3500kg and is not of a class specified in <a href="#">Table 3-4-1. Vehicle equipment standards classifications</a></li> </ul>
<b>Heavy vehicle Specialist Vehicle Inspection Requirements Manual</b>	means the revision that was current at the time of issue of certification of the document published by NZTA indicating to the HV certifier and inspecting organisation how any vehicle must be inspected under the Rule and their Notice of Appointment.
<b>Hook truck</b>	means a vehicle recovery service vehicle with a crane hoist that partially lifts the vehicle to be recovered, which is then towed in this position.
<b>HVS certifier</b>	means a heavy vehicle specialist certifier appointed by NZTA under the Rule to certify certain aspects of vehicles before the vehicle can be given a certificate of fitness.
<b>Inspection and certification</b>	means the performance of two or more of the following, for the purposes of determining compliance with applicable requirements: <ul style="list-style-type: none"> <li>a) examining vehicles</li> <li>b) determining whether or not a vehicle or specific aspect of a vehicle complies with applicable requirements</li> <li>c) issuing evidence of vehicle inspection</li> <li>d) recording and making available information about vehicles (including their systems, components, devices, fittings and equipment).</li> </ul>
<b>Inspection and certification document</b>	means a document required, produced or issued in the inspection and certification process, including a plate, a label, an electronic record and a check sheet.
<b>Inspection and certification outcome</b>	in relation to a vehicle, means: <ul style="list-style-type: none"> <li>a) production of a record of determination as appropriate to the inspection and certification activity, or</li> <li>b) provision of other records and information about the vehicle to NZTA or other persons, or</li> <li>c) production of evidence of vehicle inspection.</li> </ul>
<b>Inspecting organisation</b>	means an organisation appointed under 2.2 of the Rule to carry out inspection and certification activities. An HVS certifier is an inspector and an inspecting organisation.

<b>Kingpin</b>	means a pin attached to the skid plate of a semi-trailer and used for connecting the semi-trailer to the fifth wheel of a towing vehicle.
<b>Land transport document</b>	has the same meaning as in the <a href="#">Land Transport Act 1998</a>
<b>Lifting gear</b>	in relation to a vehicle recovery service vehicle, means any equipment used to lift another vehicle, and includes towing attachments.
<b>Light trailer</b>	means a trailer that has a gross vehicle mass of 3500kg or less.
<b>Load</b>	includes part of a load and: <p>a) includes covers, ropes, ties, blocks, tackles, barrows or other equipment or objects used in the securing or containing of a load on a vehicle or the loading or unloading of a vehicle, whether or not any other load is on the vehicle, and</p> <p>b) does not include animal wastes discharged from animals being carried on a vehicle at the time.</p>
<b>Load anchorage point</b>	means a device permanently attached to a vehicle to enable a load to be secured or attached to the vehicle.
<b>Load rating</b>	means the maximum force that can be withstood without incurring any loss of structural capacity.
<b>Load securing equipment</b>	means equipment or a device permanently fitted to a vehicle to secure, either by itself or in conjunction with other equipment or devices such as lashings, a load to a vehicle.
<b>Load-sharing axle set</b>	means an axle set suspension system that has effective damping characteristics on all axles of the set and is built to divide the load between the tyres on the set so that no tyre carries a mass more than 10% greater than the mass it would carry if: <p>a) the load were divided in the axle set so that each tyre carries an equal load, or</p> <p>b) the axle set is a tandem axle set comprising a twin-tyred axle and a large single-tyred axle and is built to divide the load between the tyres on the set so that: <p>i. 60% of the load is borne by the twin-tyred axle and 40% of the load is borne by the large single-tyred axle, or</p> <p>ii. 55% of the load is borne by the twin-tyred axle and 45% of the load is borne by the large single-tyred axle.</p> </p>

<b>Logging bolster</b>	means a vertically orientated member attached to a vehicle that is used to secure loads of timber logs.
<b>Manufacturer's operating limits</b>	<p>means:</p> <p>a) in relation to a motor vehicle, the allowance provided by the vehicle manufacturer in terms of performance capability and dimensions, relative to deterioration, malfunction or damage beyond which the safe performance of the vehicle, as defined by the vehicle manufacturer, is compromised, and</p> <p>b) in relation to a system, component or item of equipment, incorporated in or attached to a vehicle, the allowance provided by the system, component or equipment manufacturer in terms of performance capability and dimensions, relative to the deterioration, malfunction or damage, beyond which the safe performance of the system, component or item of equipment (and consequently the vehicle) is compromised.</p>
<b>Mass</b>	in relation to a vehicle, means the quantity of material contained in or on the vehicle that, when subjected to acceleration due to gravity, will exert downwards on a level surface a force that can be measured as the weight of the vehicle.
<b>Maximum towed mass</b>	means the maximum permitted mass of all vehicles that may be towed behind a vehicle as determined by the manufacturer of the towing vehicle and approved by NZTA.
<b>Modify</b>	in relation to a vehicle, means to change the vehicle from its original state by altering, substituting, adding or removing any structure, system, component or equipment but does not include repair.
<b>Monocoque</b>	in relation to a vehicle, means that the chassis of the vehicle is integral to the body.
<b>Motor vehicle</b>	<p>means a vehicle drawn or propelled by mechanical power, including its structure, systems, components and equipment. This includes a trailer, but does not include:</p> <p>a) a vehicle running on rails</p> <p>b) an invalid carriage</p> <p>c) a trailer (other than a trailer designed solely for the carriage of goods) that is designed and used exclusively as part of the armament of the New Zealand Defence Force</p> <p>d) a trailer running on one wheel and designed exclusively as a speed measuring device or for testing the wear of vehicle tyres</p> <p>e) a vehicle designed for amusement purposes and used exclusively within a place of recreation, amusement or entertainment to which the public does not have access with motor vehicles</p> <p>f) a pedestrian-controlled machine.</p>

<b>Operate</b>	in relation to a vehicle, means to drive or use the vehicle on a road, or to cause or permit the vehicle to be on a road or to be driven on a road, whether or not the person is present with the vehicle.
<b>Original equipment</b>	means equipment that is fitted by the vehicle manufacturer when the vehicle is manufactured or equipment that is approved by the vehicle manufacturer for use in a specific vehicle type for a specific purpose.
<b>Outrigger</b>	in relation to a vehicle that is fitted with a crane or hoist, means a device fitted to the vehicle that extends and stabilises the vehicle while the crane or hoist is in use.
<b>Payload capacity</b>	means the gross vehicle mass of a vehicle less its unladen mass.
<b>Pole trailer</b>	means a trailer that is attached to a towing vehicle by a telescoping or sliding pole, and is designed to support a common long load spanning between the trailer and the towing vehicle.
<b>Power pack</b>	means the engine, its radiator/cooling pack, induction and exhaust system, including layout, and any accessories or emissions control equipment, such as 'addblue', specified by the manufacturer.
<b>Procedure documentation sheet</b>	means a document that defines and records the procedures and calculations and design criteria and includes all documents relating to HVS specialist certification.
<b>Quad-axle set</b>	means a set of four axles, where: <ul style="list-style-type: none"> <li>a) the centres of the first and fourth axles are spaced not less than 3.75m and not more than 4m apart, and</li> <li>b) all axles contain an equal number of tyres, and</li> <li>c) none of the axles is a single standard-tyred axle.</li> </ul>
<b>Record of determination</b>	means a record, in paper or electronic form, that a vehicle or specific aspect of a vehicle complies or does not comply with applicable requirements. If the specific aspect of the vehicle complies, this is to be shown on an LT400. The results of inspections before the aspect complies are recorded on the Procedure documentation sheet.
<b>Re-enter service</b>	in relation to a vehicle previously certified for entry means to begin to be operated in-service again.
<b>Registered</b>	in relation to a vehicle, means registered under the <a href="#">Land Transport Act 1998</a> .

<b>Registration number</b>	means the combination of numbers or letters on a registration plate, issued under the <a href="#">Land Transport Act 1998</a> , for use on a registration plate.
<b>Repair</b>	in relation to a vehicle, means to restore a damaged or worn vehicle, its structure, systems, components or equipment, and includes the replacement of damaged or worn structures, systems, components and equipment with equivalent undamaged or new structures, systems, components and equipment.
<b>Rigid tow-pole</b>	means an inflexible bar with a coupling at each end that can be connected to the coupling fitted to the rear of a vehicle recovery service vehicle and to the coupling fitted to the front of a vehicle to be recovered without lifting that vehicle.
<b>Rule</b>	means the <a href="#">Land Transport Rule Vehicle Standards Compliance 2002</a> and its amendments.
<b>Safe tolerance</b>	means the tolerance within which the safe performance of the vehicle, its structure, systems, components or equipment is not compromised, having regard to any manufacturer's operating limits.
<b>Semi-trailer</b>	means a trailer, with only one axle set, that is partially superimposed on the towing vehicle so that a substantial part of the trailer and its load is borne by the towing vehicle.
<b>Sideboard</b>	means the substantially vertical part of the side of a flat-deck body of a vehicle.
<b>Single-axle set</b>	means either one axle or two axles having their centres spaced less than 1m apart.
<b>Skid plate</b>	means the plate structure forming part of the semi-trailer that houses the kingpin and that mounts on the coupler plate to form the connection between the towing vehicle and the semi-trailer.
<b>Specialist inspection and certification</b>	means inspection and certification of a specific aspect of a vehicle.
<b>Special purpose vehicle</b>	means a vehicle that is a street sweeper, refuse collector, weed sprayer or road marker.
<b>Statement of compliance</b>	means a statement in a format specified by NZTA confirming that a vehicle or component complied with one or more approved vehicle standards when manufactured or modified.

<b>Statement of Design Compliance</b>	is a document that is drawn up and signed by an authorised HVS engineer certifier which contains the designs, calculations, materials, processes and methods for completing the design so that the finished vehicle or specific aspect will comply with all applicable requirements.
<b>Steering axle</b>	means the axle of a vehicle where the wheels can turn at an angle to the centreline of the vehicle.
<b>Stinger-lift truck</b>	means a vehicle recovery service vehicle with an arm that partially lifts the vehicle to be recovered, which is then towed in this position.
<b>Stockcrate</b>	means a container designed for transporting livestock, which can be secured to a vehicle.
<b>Stockcrate retention device</b>	means one or more restraining devices or lashings to facilitate the attachment of the stockcrate to the deck or chassis of a vehicle.
<b>Suspension system</b>	means a system that allows controlled and limited movement of an axle relative to the chassis or body of a vehicle; includes a spring and damping system and any associated controls.
<b>Tailboard</b>	means the substantially vertical part of the rear end of a flat-deck or curtain-sided body of a vehicle.
<b>Tandem-axle set</b>	means an axle set comprising two axles having their centres spaced not less than 1m and not more than 2m apart.
<b>Three-point linkage</b>	means, for a tractor or agricultural trailer, a towing connection that has three points of attachment.
<b>Towbar</b>	means the part of the towing vehicle to which a coupling for a light trailer is connected.
<b>Towing connection</b>	means the combination of components that enables one vehicle to tow or be towed by another vehicle; includes a towbar, drawbar, drawbeam and coupling.
<b>Traction engine</b>	has the same meaning as in section 2(1) of the <a href="#">Land Transport Act 1998</a>
<b>Tractor</b>	means a motor vehicle (other than a traction engine) constructed principally for towing an agricultural trailer or powering agricultural implements.

<b>Trailer</b>	<p>means a vehicle without motive power that is capable of being drawn or propelled by a motor vehicle from which it is readily detachable, but does not include:</p> <ul style="list-style-type: none"> <li>a) a sidecar attached to a motorcycle, or</li> <li>b) a vehicle normally propelled by mechanical power while it is being temporarily towed without the use of its own power.</li> </ul>
<b>Transmission</b>	<p>in relation to a motor vehicle, means the gearing system and related components, including a driveshaft, by which power is transmitted from the flywheel or the engine output shaft to the input shafts of the powered axles.</p>
<b>Transporter</b>	<p>in relation to a vehicle recovery service vehicle, means a vehicle equipped with a tray body that:</p> <ul style="list-style-type: none"> <li>a) can move back and be tilted so that the rear end of the tray rests on the ground, or</li> <li>b) remains fixed and onto which the vehicle to be recovered is moved up ramps or lifted.</li> </ul>
<b>Tri-axle set</b>	<p>means a set of three axles, where:</p> <ul style="list-style-type: none"> <li>a) the centre of the first and third axles are spaced not less than 2m and not more than 3m apart, and</li> <li>b) all axles contain an equal number of tyres, and</li> <li>c) none of the axles is a single standard-tyred axle.</li> </ul>
<b>Twin-steer axle set</b>	<p>means a tandem-axle set with single tyres, where both axles are connected to the same mechanism in order to steer similarly.</p>
<b>Two-point linkage</b>	<p>means, for an agricultural trailer, a towing connection that has two points of attachment.</p>
<b>UN/ECE</b>	<p>is an abbreviation for a regulation of the United Nations Economic Commission for Europe.</p>
<b>Unladen mass</b>	<p>in relation to a vehicle, means the mass of the vehicle together with the fuel in its fuel system (if any) and the equipment and accessories on it that are necessary for its operation for the purpose for which it was designed.</p>
<b>Vehicle identification number</b>	<p>means a group of letters and numbers consisting of 17 characters that:</p> <ul style="list-style-type: none"> <li>a) is affixed to a vehicle in accordance with the relevant standard prescribed under the <a href="#">Land Transport Rule Vehicle Standards Compliance 2002</a>, and</li> <li>b) is capable of being decoded to provide identifying information about that vehicle.</li> </ul>

<b>Vehicle inspector</b>	means an individual appointed under section 2.2 of the Rule to carry out inspection and certification activities.
<b>Vehicle standard</b>	means a technical specification with which a vehicle component or system must comply, and which is adopted by: <ul style="list-style-type: none"> <li>a) the New Zealand Standards Council, or</li> <li>b) any international, national or regional organisation with functions similar to the New Zealand Standards Council.</li> </ul>
<b>Vehicle recovery service vehicle</b>	means a vehicle used in a vehicle recovery service for towing or transporting on a road any motor vehicle; does not include a vehicle that is not designed or adapted for the purpose of towing or carrying motor vehicles.
<b>Waka Kotahi, NZ Transport Agency, NZTA</b>	New Zealand Transport Agency established by section 93 of the Land Transport Management Act 2003.